(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 1 July 2004 (01.07.2004)

PCT

(10) International Publication Number WO 2004/054417 A1

(51) International Patent Classification⁷: 36/02

A47J 37/12,

(21) International Application Number:

PCT/IB2003/005246

(22) International Filing Date:

17 November 2003 (17.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

02080359.9

18 December 2002 (18.12.2002)

(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and


(75) Inventor/Applicant (for US only): EHLHARDT, Huub

[NL/NL]; c/o Prof . Holstlaan 6, NL-5656 AA Eindhoven (NL).

- (74) Agent: SCHOUTEN, Marcus, M.; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KÉ, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: DEEP FAT FRYER AND COLLAR FOR SUCH A FRYER

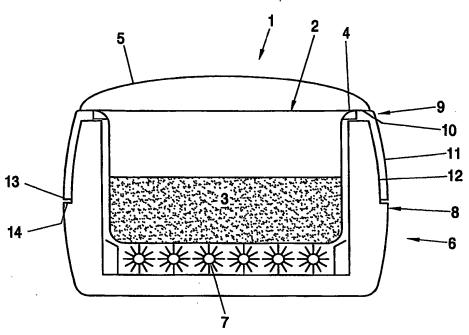

(57) Abstract: A deep fat fryer including a pan (2) for holding liquid fat for frying food, the pan (2) having a brim (4) extending along its topmost end, a heater (7) for heating fat in the pan (2), a housing shielding the pan (2) from the environment, an upright exterior wall surface (8) facing away from the pan (2), and a collar (9) extending closely along the brim (4) of the pan (2). The collar (9) is detachable and includes a flange (11) projecting outwardly from the brim (4) and shields at least a portion of the upright exterior wall surface (8). The flange (11) counteracts soiling of upright exterior wall surface (8) and can be cleaned or disposed easily.